Watco Manufacturing Submittal Sheet

Job Name	Item Designation
Job Location	Contractor
Engineer	Representative

Watco 901 Innovator® Half Kit

Features:

- Extends into tub through overflow; tightens securely with retainer nut
- Overflow ell is self-centering, self-aligning and won't slip
- Eliminates costly behind-tub leaks
- Includes drain test plug and overflow test membrane; testable up to five floors (22 psi)
- · No tools required
- Available with Circular or Square overflow faceplate excluding White
- Available in PVC and ABS

Approvals:

 Manufactured in compliance with ASME A112.18.2- 2015/ CSA B125.2-2015.


















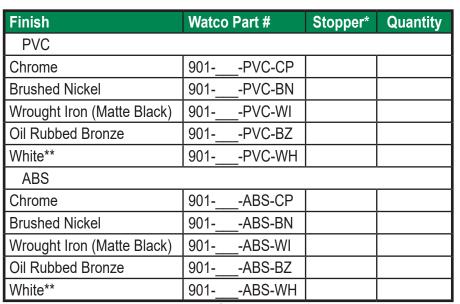


* Provide Stopper Type
Example 901-PP-PVC-CP
**Square Plate not available in White

For More Information Contact:
WATCO Manufacturing Company
1220 South Powell Road
Independence, MO 64057-2724
Ph. 816-796-3900 • FAX 816-796-0875
Www.watcomfg.com









Includes built-in test membrane



Easily remove membrane after



Snap-on overflow plate.
No screws



Overflow ell extends through Overflow

Form: 901Sub Rev. 100 04/21

WATCO